


P/N	L/(M)	T/(MM)
26-0150MF	15	200
26-0200MF	20	250
26-0250MF	25	300
26-0300MF	30	250
26-0500MF	35	600

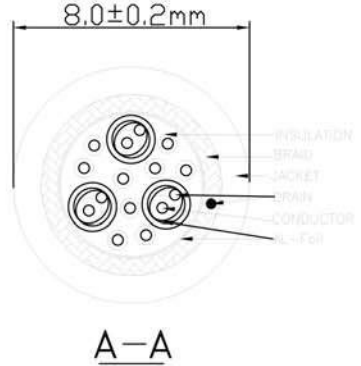

P1		P2	
1	Red coax conductor	1	9
2	Green coax conductor	2	10
3	Blue coax conductor	3	11
4		4	12
5		5	13
6	Red coax drain	6	14
7	Green coax drain	7	15
8	Blue coax drain	8	

Pin OUT

P1	P2
9	9
10	10
11	11
12	12
13	13
14	14
15	15

SHELL — Drain — SHELL

NOTE:  
 1. 100% conduction, short circuit, misalignment test  
 2. RoHS & REACH Compliant  
 3. Marking: CONNEKT GEAR AWM STYLE 2919 80°C 30V LOW  
 VOLTAGE Computer Cable RoHS & REACH Compliant

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑦	MOLDED	45P BLACK PVC	48	G
⑥	MOLDED	LD-PE	21	G
⑤	NUT	4-40UNC 5.3x6MM,NICKEL PLATED	2	PCS
④	SCREW	4-40UNC 2.3x4.5MM,NICKEL PLATED	4	PCS
③	CONNECTOR	HDB 15PIN/FEMALE,BLUE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	HDB 15PIN/MALE,BLUE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	(1C*7/0.12BC+FPE+7/0.12BC+AL+PVC)*3C+9C*7/0.12BC+AL+7/0.12BC+B(80/0.12ALM)+BLACK PVC,OD:8.0MM	L	MM

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	Checked by	Approved by - date 15-11-2018	File name 26-0xxMF
Date		15-11-2018	Scale FREE
VGA M/F CABLE			
26-0150/0200/0250/0300/0500MF		Edition 1	Sheet 1/1

