REV. NO.	REV. NOTE	DATE	SIGNED	CHECKED

SPECIFICATIONS:

1. USB2.0 protocol, with chipset for voice codec, leading out the voice from computer to external USB speaker.
2. Input: compatible with USB2.0,USB3.0, plug & play, no driver required
3. USB BUS-Powered, 5V, no external power required.
4. Compatible with: WindowsXP, Vista/7/8/10/or above, MAC8.6 or above.
5. Speaker output power: 2X 3W, total 6W.
6. Speaker impedance: 4Ohm X2
7. Sensitivity: 45dB.
8. Speaker size each : 65(L)x65(W)x64(D) mm
9. USB2.0 cable length: 0.9m +/- 5%

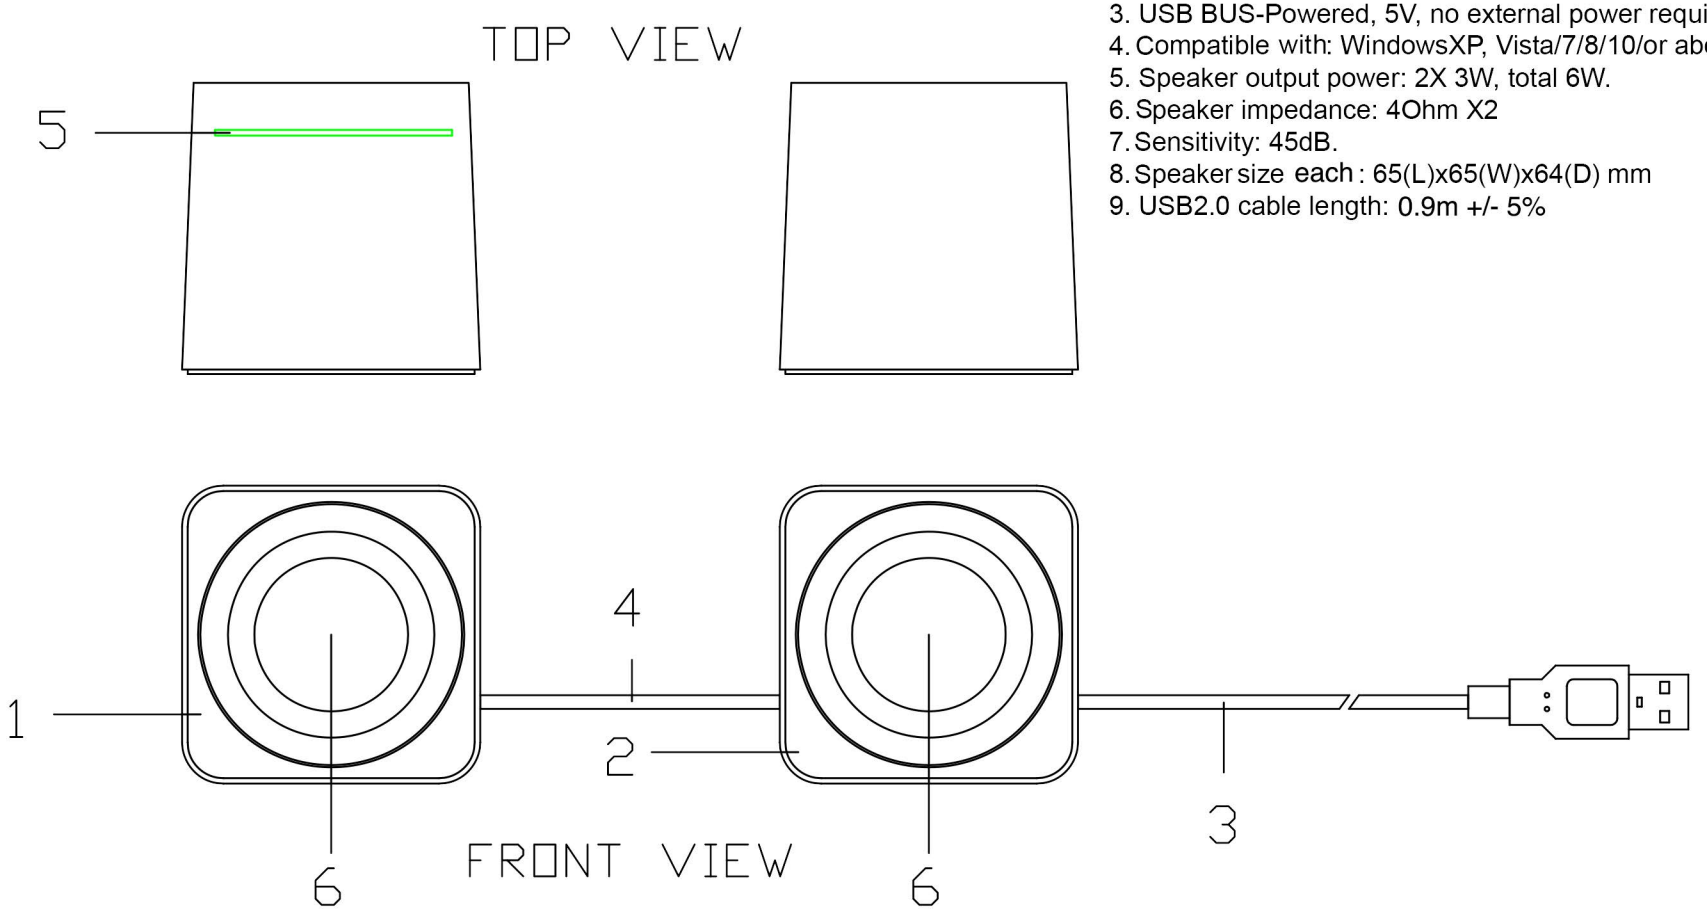

NO.	MATERIAL	DESCRIPTION
6	SPEAKER	2X 4OHM 3W, SPEAKER.
5	USB2.0 SPEAKER PCBA	USB2.0 CABLE, BLACK, WITH USB.20 A PLUG.
4	SPEAKER CABLE	2 WIRES INSIDE, BLACK PVC
3	USB2.0 CABLE	USB2.0 CABLE, 4WIRES INSIDE, BLACK, WITH USB.20 A PLUG.
2	SPEAKER BOX, RIGHT	ABS PLASTIC, BLACK COLOR FOR CABINET, WHITE FOR FACE
1	SPEAKER BOX, LEFT	ABS PLASTIC, BLACK COLOR FOR CABINET, WHITE FOR FACE

Item ref.	Quantity	Title/Name.description,material,dimension etc.			Article No./Ref.
Designed by		Checked	Approved by-date	File name	Date / Scale
ANGLE:				USB2.0 MINI SPEAKER	
UNIT:MM				24-1018	Edition / Sheet

由 Autodesk 教育版产品制作