



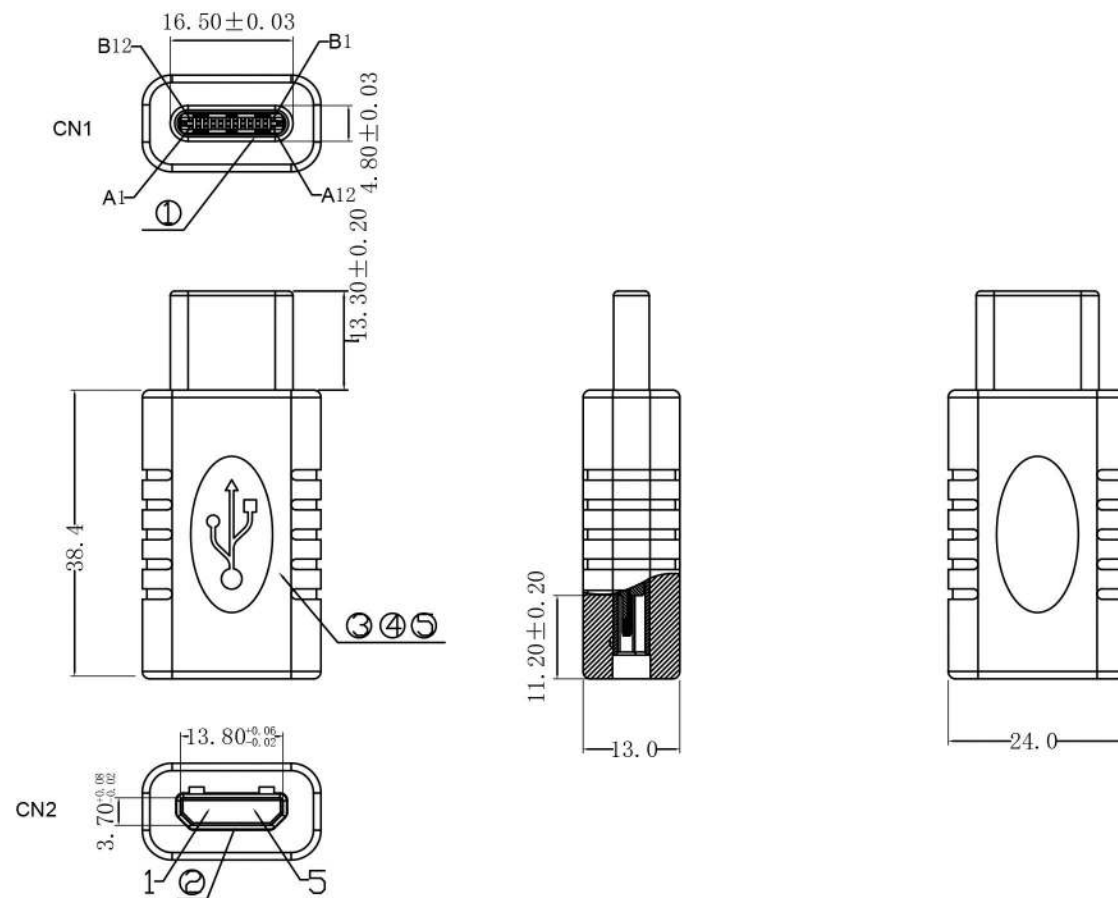

NOTE:

- TESTING CONDITIONS:
 - 100% TEST FOR OPEN AND SHORT
 - CONDUCTOR RESISTANCE: 3Ω
 - INSULATION RESISTANCE: $10M\Omega/DC300/0.01S$
- SUPPORT OTG
- ALL COMPONENTS ARE RoHS/REACH COMPLIANT.

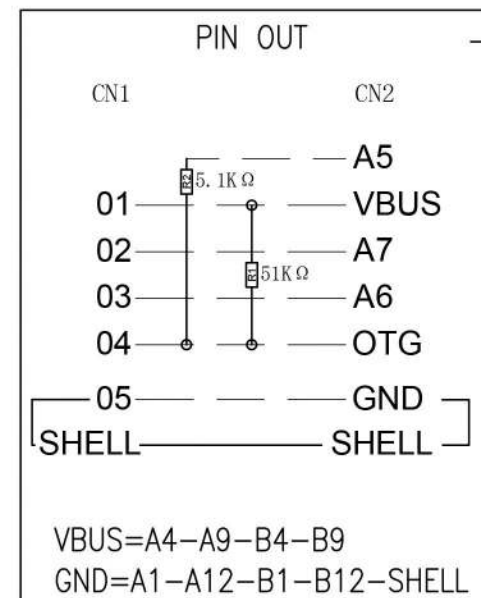

⑤	MOLDED	OVER MOLDING: BLACK PVC	AR	G
④	MOLDED	INNER MOLDING: PE	AR	G
③	PCB	PCB: R1 51KΩ, R2 5.1KΩ	1	PCS
②	CONNECTOR	USB2.0 MICRO FEMALE: GOLD PLATED CONTACTS, NICKEL PLATED SHELL, BLACK INSULATION	1	PCS
①	CONNECTOR	TYPE C MALE: GOLD PLATED CONTACTS, NICKEL PLATED SHELL, BLACK INSULATION	1	PCS
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference		
Designed by		Checked by	Approved by - date	File name	Date 2019-10-21	Scale FREE	
ANGLE: 		ADAPTOR: TYPE CM TO 2.0 MICRO FEMALE, BLACK					
UNIT:MM		26-0440			Edition 1	Sheet 1/1	