


PIN OUT

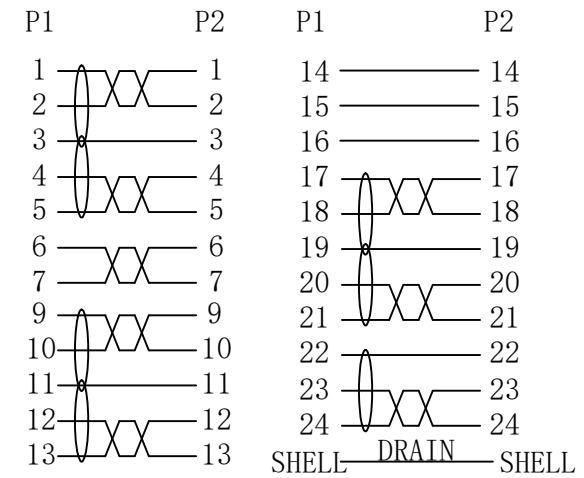

NOTES:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 10mS 10MΩ (Min)
3. Conductive Resistance: 5Ω (Max)
4. RoHS & REACH COMPLIANT

⑦	DUST CAP	DVI MALE DUST CAP	1	PCS
⑥	MOLDED	45P BLACK PVC		G
⑤	MOLDED	LDPE		G
④	SCREW	IRON, NICKEL PLATED SCREW	2	PCS
③	CONNECTOR	DVI (24+1) MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	2	PCS
②	CONNECTOR	DVI (24+1) MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	(28#BC*1P+D+AM)*7C+28#*1P+28#*3C+ADB, BLACK PVC JACKET, OD:8.3±0.2mm MARKING:AWM STYLE 20276 VW-1 80°C 30V DVI CABLE ROHS & REACH Compliant	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 11. 06	File name	Date 2025. 11. 06	Scale FREE	
ANGLE:				DVI (24+1) M/2F		
UNIT:MM				26-1529	Edition 1	Sheet 1/1