


P/N	L/mm	T/mm
26-1649	500	10
26-1669	1000	20
26-1652	2000	30
26-1661	3000	40

### PIN OUT

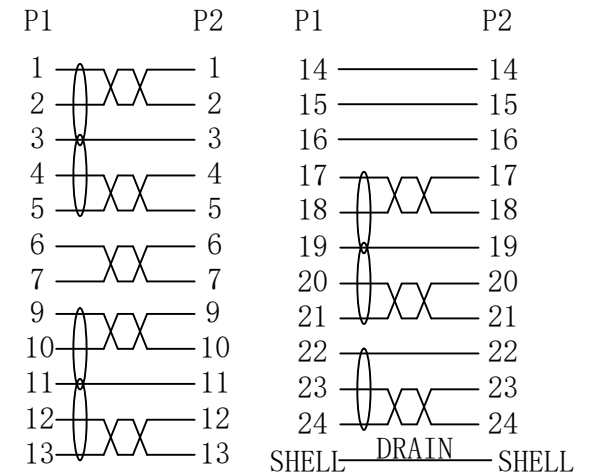

### NOTES:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 10mS 10MΩ (Min)
3. Conductive Resistance: 5Ω (Max)
4. RESOLUTION: 1920\*1080P@60Hz
5. RoHS & REACH COMPLIANT

⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	SCREW	IRON, NICKEL PLATED SCREW	4	PCS
②	CONNECTOR	DVI (24+1) MALE, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL	2	PCS
①	CABLE	(1/0. 254BC*1P+1/0. 254CCS+AM) X7+1/0. 254BC*1P+1/0. 254BC*3C+AL+D(1/0. 254BC)+B(80/0. 12AL-MG), BLACK PVC JACKET, OD: 7.3±0.2mm MARKING: AWM STYLE 20276 VW-1 80°C 30V DVI CABLE ROHS & REACH Compliant	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 11. 06	File name	Date 2025. 11. 06	Scale FREE
ANGLE:					DVI (24+1) M/M	
UNIT:MM					26-16XX	Edition 1