



L+T SEE TABLE

4.8±0.3

PIN OUT

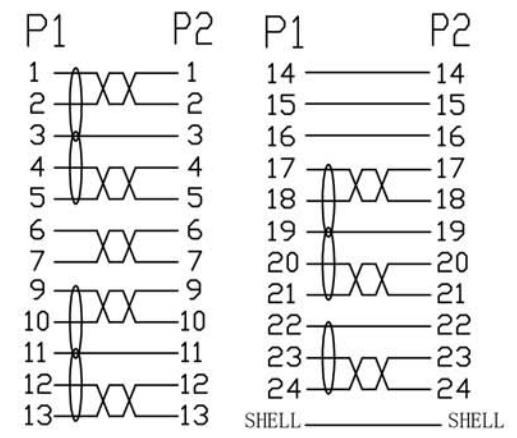

P/N	L/(M)	T/(MM)
26-1652	2	30
26-1661	3	45

NOTES:

- 1:100% short,open and miss wire test.
- 2:Cable marking:AWM STYLE 20276 VW-1 80°C 30V  
DVI Cable RoHS & REACH Compliant

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑤	OUTER MOULDED	BLACK 45P PVC	0.048	KG
④	INNER MOULDED	LDPE	0.021	KG
③	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	4	PCS
②	CONNECTOR	DVI 24+1/M BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*71/0.254BC+D+FAM)*7C+1P*1/0.254BC+3C*1/0.254BC+AL+D 1/0.254BC +B(16/5/0.12ALM). JACKET:BLACK PVC.OD:7.3±0.2MM	L	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference		
Designed by	Checked by	Approved by - date	File name	Date	Scale		
		JUL 27.2015	DVI 24+1 TO DVI 24+1	JUL 27.2015	FREE		
ANGLE:					DVI-D DUAL LINK CABLE,DVI24+1,BLACK		
UNIT:MM					26-1652,26-1661	Edition 1	Sheet 1/1