


P/N	L/(M)	T/(MM)
26-2906	5	75
26-2930	10	150

NOTES:

- 1:100% short,open and miss wire test.
- 2:Marking:CONNEKT GEAR AWM STYLE 2725 80c 30V VW-1
USB2.0 High Speed Cable RoHS & REACH Compliant.
- 3:RoHS & REACH Compliant.

PIN OUT

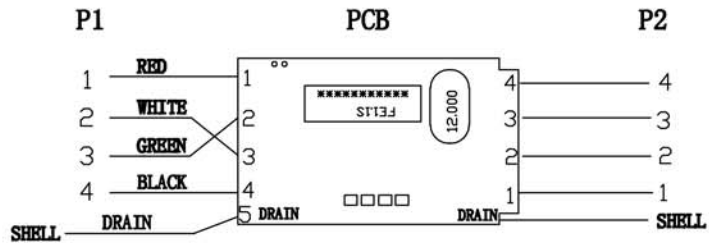

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑦	OUTER MOULDED	BLACK 45P PVC	0.032	KG
⑥	INNER MOULDED	LDPE	0.032	KG
⑤	PLASTIC SHELL	PLASTIC SHELL FOR AF,BLACK ABS,WITH GREY(SR7C) PRINTING.	1	PCS
④	PCB BOARD	PCB-FE1.1S	1	PCS
③	CONNECTOR	USB A TYPE FEMALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	1P*28AWG+2C*24AWG+ALF+D+B(64/0.1CCS),JACKET:BLACK PVC,OD:4.8±0.2MM	L	M

Ltremref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference		
Designed by	Checked by	Approved by - date NOV.2.2015	File name USB2.0 Extension Cable	Date NOV.2.2015	Scale FREE
ANGLE:			USB2.0 Extension Cable,AM-AF,5M,10M		
UNIT:MM			26-2906,26-2930	Edition 1	Sheet 1/1