


| P/N | L/(M) | T/(MM) |
|---------|-------|--------|
| 26-2944 | 0.5 | 20 |
| 26-2945 | 1.0 | 20 |
| 26-2923 | 2.0 | 30 |

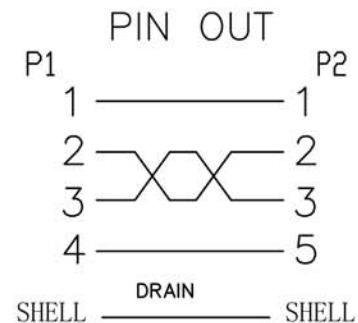

NOTES:

- 1:100% short,open and miss wire test.
- 2:Cable marking:CONNEkT GEAR AWM STYLE 2725 80°C 30V
VW-1 USB2.0 High Speed Cable RoHS & REACH Compliant

| | | | | |
|-----|---------------|--|-------|------|
| ④ | OUTER MOULDED | BLACK 45P PVC | 0.032 | KG |
| ③ | CONNECTOR | MICRO USB 5PIN B/M,BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN | 1 | PCS |
| ② | CONNECTOR | USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN | 1 | PCS |
| ① | CABLE | 1P*28AWG+2C*28AWG+ALF+D+B(48/0.12ALM),JACKET:BLACK PVC,OD:3.9±0.1MM | L | M |
| NO. | MATERIAL | DESCRIPTION | QTY. | UNIT |

| | | | | | | |
|-------------|------------|---|--------------------------------|--------------------------|-----------------------|--------------|
| Ltemref | Quantity | Title/Name,designation,material,dimension etc | | | Article No./Reference | |
| Designed by | Checked by | Approved by - date AUG.5.2015 | File name USB2.0 AM-MICRO B | Date AUG.5.2015 | Scale FREE | |
| ANGLE: | | | | USB2.0 AM-MICRO 5PIN BM | | |
| UNIT:MM | | | | 26-2944, 26-2945,26-2923 | Edition 1 | Sheet 1/1 |