


NOTES:

- 1:100% short,open and miss wire test.
- 2:Marking:CONNEKT GEAR USB3.0 Cable E\*\*\*\*\*  
AWM 20276 80c 30V VW-1
- 4:RoHS & REACH Compliant.

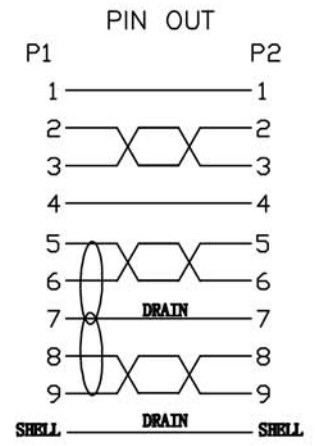

⑤	OUTER MOULDED	PVC,BLACK,45P	0.038	KG
④	INNER MOULDED	LDPE	0.020	KG
③	CONNECTOR	USB3.0 A TYPE FEMALE,GOLD PLATED PIN,NICKEL PLATED SHELL,BLUE INSULATION	1	PCS
②	CONNECTOR	USB3.0 A TYPE MALE,GOLD PLATED PIN,NICKEL PLATED SHELL,BLUE INSULATION	1	PCS
①	CABLE	USB3.0:(28#*1P+D+ALM)*2C+28#*1P+28#*2C+ADB,JACKET:BLACK PVC,OD:5.5MM	2	M
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

LItemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date NOV 11.2015	File name USB3.0 AM-AF	Date NOV 11.2015	Scale FREE	
ANGLE:	USB3.0 AM-AF,BLACK,2M					
UNIT:MM	26-2953			Edition 1	Sheet 1/1	