


PIN OUT

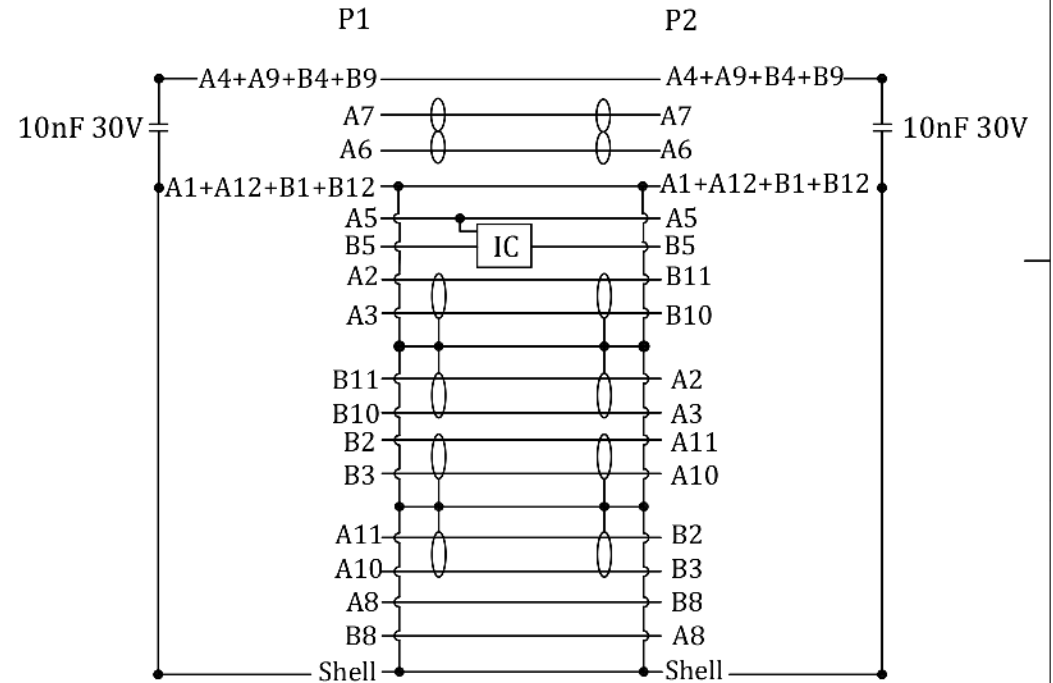

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTENCE: 100%.
- 2.CONDUCTIVE RESISTANCE:2 ohm (MAX)
- 3.Vconn B5 EARTH IMPEDANCE:1K ohm
- 4.RoHS & REACH Compliant

⑥	OVER MODEL	85A BLACK TPE	12	G
⑤	INNER MODEL	WHITE TPE	6	G
④	SHIELDING CASE	USB3.1 C Male Upper and lower shield	1	SET
③	CONNECTOR	USB3.1 C Male+PCBA, Pin Gold 30u", Shell Nickel Plated, without E-MARK	1	PCS
②	CONNECTOR	USB3.1 C Male+PCBA, Pin Gold 30u", Shell Nickel Plated, with E-MARK	1	PCS
①	CABLE	UL21572 USB3.1 CABLE [(30AWG*1P+EAM)*4+(30AWG*1P+EA)+23AWG*2C+32AWG*4C]+AB BLACK TPE OD:5.25±0.1MM	1000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale
		12-06-2019		12-06-2019	FREE
ANGLE:	USB3.1 CM-CM 1M GEN2,5A10G(with IF Certificate)				
UNIT:MM	26-2959	Edition	Sheet		
		1	1/1		