


NOTES:
 1. Resolution:1920*1080P@60Hz.
 2. RoHS & REACH COMPLIANT

PIN OUT

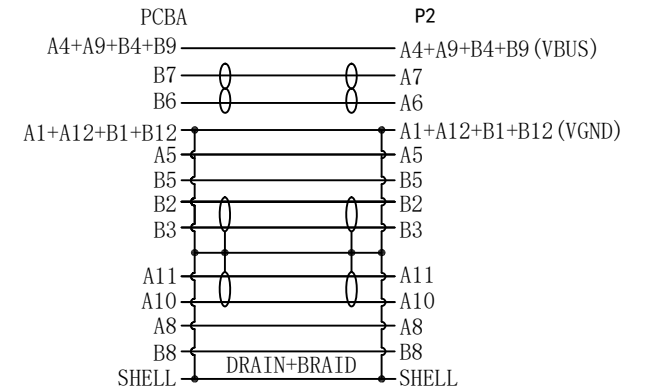

⑧	DUST CAP	TYPE C MALE DUST CAP	1	PCS
⑦	DUST CAP	VGA MALE DUST CAP	1	PCS
⑥	MOLDED	45P BLACK PVC		G
⑤	MOLDED	LDPE		G
④	THUMB SCREW	#40-40 B-L46, BLACK PVC	2	PCS
③	CONNECTOR	TYPE CM TO VGA M PCBA, THE PIN GOLD PLATED, BLACK INSULATION, NICKEL PLATED SHELL +IC:RTD2166	1	PCS
②	CONNECTOR	TYPE C MALE, THE PIN GOLD PLATED, BLACK INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	[(7/0.08TC)*1P+D+AL+MY]*2C+(7/0.08TC)*1P+(7/0.08TC)*4C+(7/0.16TC)*2C +AB BLACK PVC JACKET, OD:4.5±0.2MM MARKING:E***** 兎 AWM STYLE 2725 80°C 30V VW-1 SUPER HIGH SPEED USB Revision 3.1	2000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 10. 22	File name	Date 2025. 10. 22	Scale FREE	
ANGLE:					TYPE C/M to VGA/M	
UNIT:MM					26-2992	Edition 1