


P/N	L/mm	T/mm
26-6010/8K	1000	20
26-6020/8K	2000	30
26-6030/8K	3000	50

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
3. CONDUCTIVE RESISTANCE:5 Ω Max
4. RESOLUTION:8K*4K@60Hz
5. RoHS & REACH COMPLIANT

PIN OUT

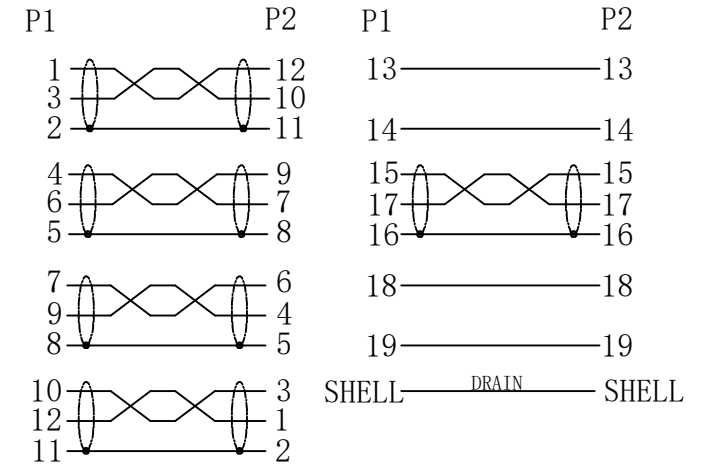

⑥	DUST CAP	DP MALE DUST CAP	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	2	SET
②	CONNECTOR	DP 20PIN MALE, PIN PLATED GOLD, BLACK INSULATION, GOLD PLATED SHELL+TINPLATE SHIELDING SHELL	2	PCS
①	CABLE	(7/0.10TC*1P+7/0.10TC+FAM)*5C+7/0.10TC*4C+AL-FOIL+D(7/0.10BC)+B(16*7/0.12AL-MG), BLACK PVC JACKET, OD:6.0±0.2MM, MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80°C 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 28	File name	Date 2025. 10. 28	Scale FREE
ANGLE:					DP1.4 M-M	
UNIT:MM					26-60X0/8K	