


P/N	L/(MM)	T/(MM)
26-6050	5000	80

**ELECTRONIC TEST:**

- 1.OPEN/SHORT/INTERMITTENCE: 100%.
- 2.INSULATION RESISTANCE:DC300V 0.01S 5MΩ(MIN)
- 3.CONDUCTIVE RESISTANCE:3 OHM (MAX)
- 4.HD-TV:4K\*2K @60Hz 4:4:4 10bit

**PIN OUT**

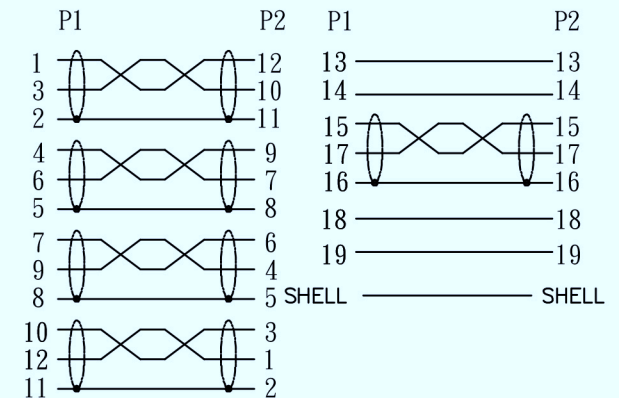

⑥	DUST CAP	DP Male DUST CAP	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LD-PE		G
③	OUTER COVER	DP Male Black ABS plastic shell	2	SET
②	CONNECTOR	DP 20PIN Male Gold plated	2	PCS
①	CABLE	(7/0.12TC*1P+7/0.12TC+FAM)*5+(7/0.12TC) *4C+A+DRAIN WIRE + B(80#/0.12AL-MG) black PVC JACKET,OD:7.3± 0.2MM, MARKING:DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		07-15-2019		07-15-2019	FREE	
ANGLE:				DP-M/M CABLE 12V BLACK		
UNIT:MM				26-6050	Edition 1	Sheet 1/1