
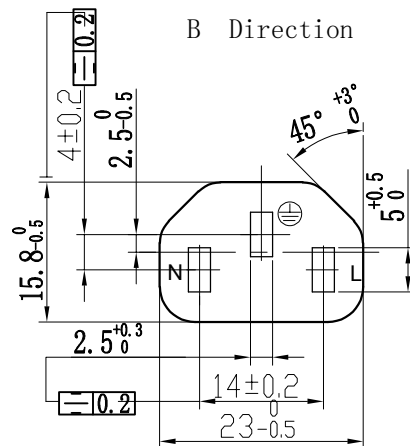
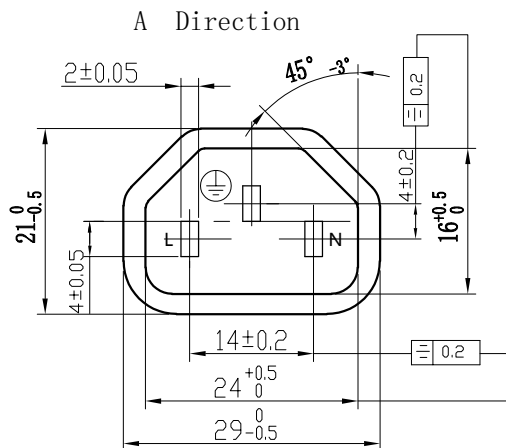


NO.

标记	处数	分区	更改	日期

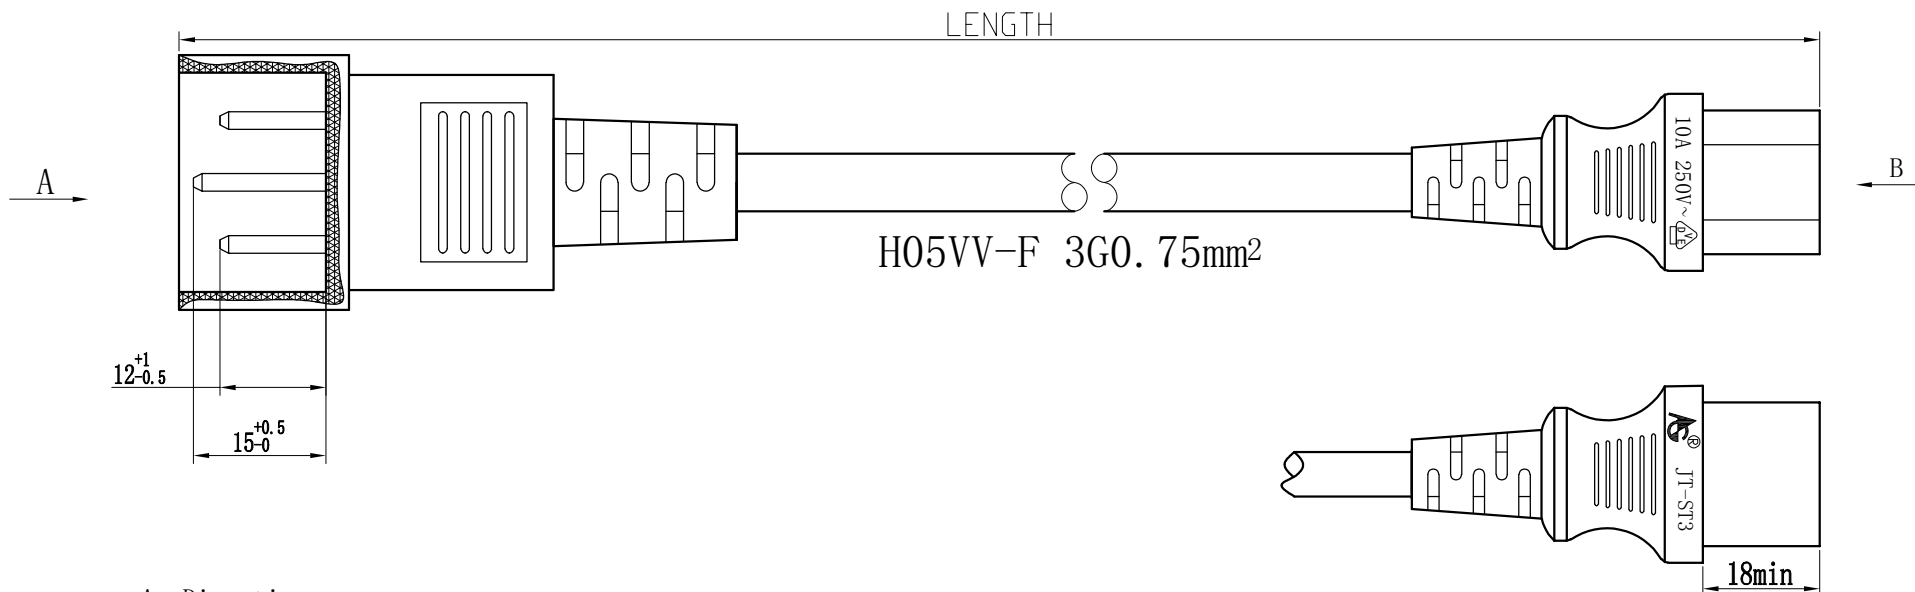

NO.	27-0067B	27-0134	COPPL0020
LENGTH (mm)	1000	500	2000
COLOR	BLACK	BLACK	BLACK

Notes:

1. Plug: JT-ST3/JT-SZ3 Clear injection no scratch and dirt;
2. Cable: H05VV-F 3G0.75mm<sup>2</sup> Jacket  $\phi 6.5 \pm 0.1$  Conductor  $24 \times 0.198 \pm 0.004$  Core  $\phi 2.4 \pm 0.1$   
Cable Mark:  $\triangleleft VDE \triangleright$  H05VV-F 3G0.75mm<sup>2</sup>
3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S  
current leakage 1mA, insulation resistance no less than 5M $\Omega$ , no strike out;

尺寸标注		公差		第三角度投影			第X张 共X张			
DIMENSION		TOLERANCE		版本	比例	第一角	UNIT	mm	比例	A4
长度	LENGTH	公差	ANGLE	版本	A	1:1	mm	比例	比例	A4
<200	±0.1	±0.5°	FILE LOCATION							
200~500	±0.3		FIGURE NO							
500~800	±0.5		FIGURE NO							
<800	±1.0		FIGURE NO							
设计	DESIGN	产品名称		JT-ST3/JT-SZ3						
审核	AURIT	PRODUCTOR NAME								
批准	APPROVAL									