
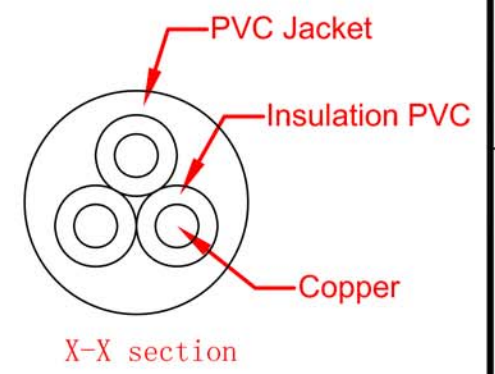
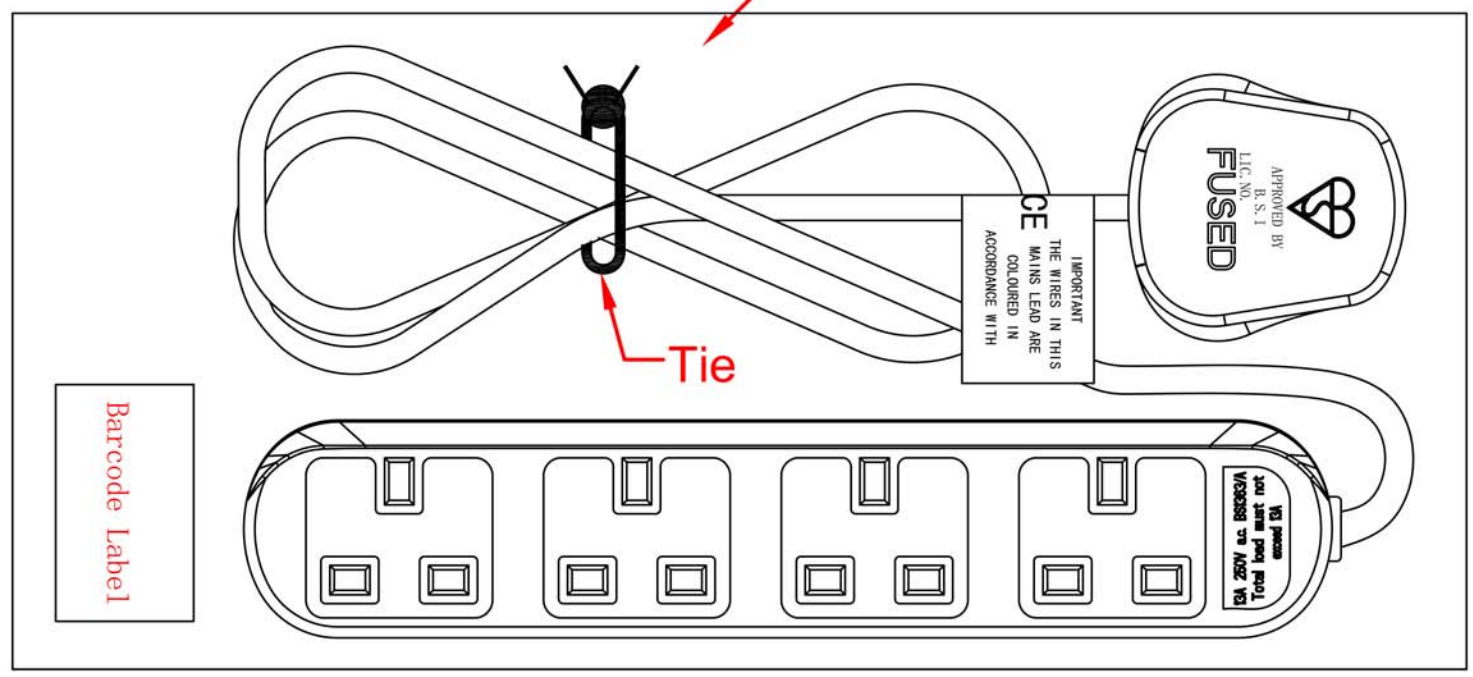


Dimension	0-8	8-25	25-50	50-100	100-200	200-300	∠ (度)
Tolerance	±0.08	±0.10	±0.12	±0.18	±0.20	±0.30	±0.20°
Mark	Modified	Modified Record		Edition	Publish	Approval	Date
				P1			2014-05-08

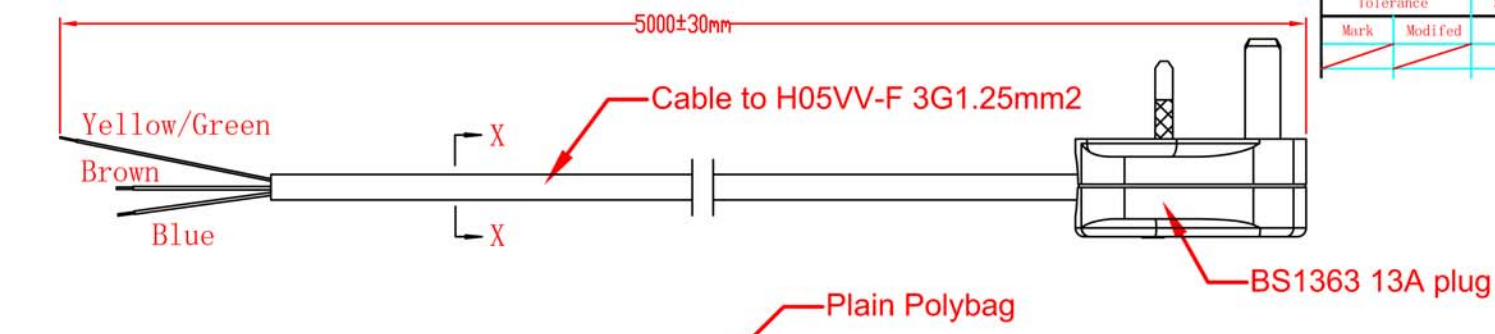

Technical requirements:

1. Plug should be Kitemark certified to BS1363-1, socket meet BS1363-2
2. Cable should be standard of BS6500 or meet equivalent standards
3. Products should meet relevant Rohs directive

DRAW:		DATE: 2014-05-08	PRODUCT NAME: 27-4050	<input type="checkbox"/> FIRST PROJECT <input checked="" type="checkbox"/> THIRD PROJECT
DESIGN:		DATE: 2014-05-08		
CHECK:		DATE: 2014-05-08	PART NAME:	PAGE: 1 OF 1
APPROVAL:		DATE: 2014-05-08	PART NUMBER: XXXXXXXX	EDITION: A3 P1
MATERIAL: xxxx		UNIT: mm	WEIGHT: xxxg	
MATT: xxxx		SCALE: xxxx		