
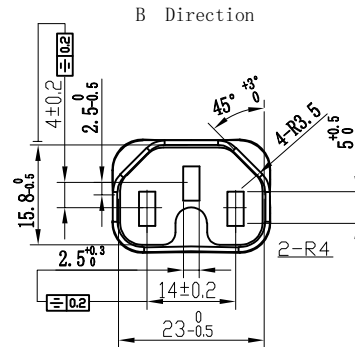
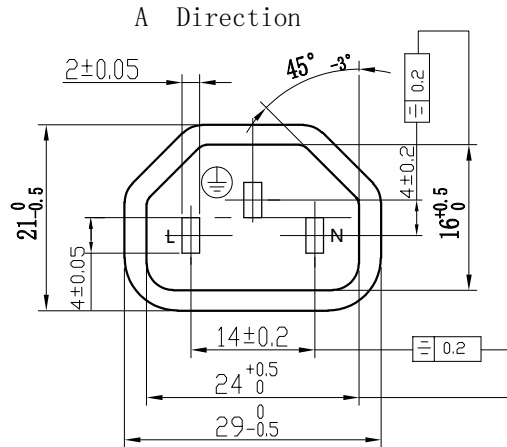


NO.

标记	处数	分区	更改	日期

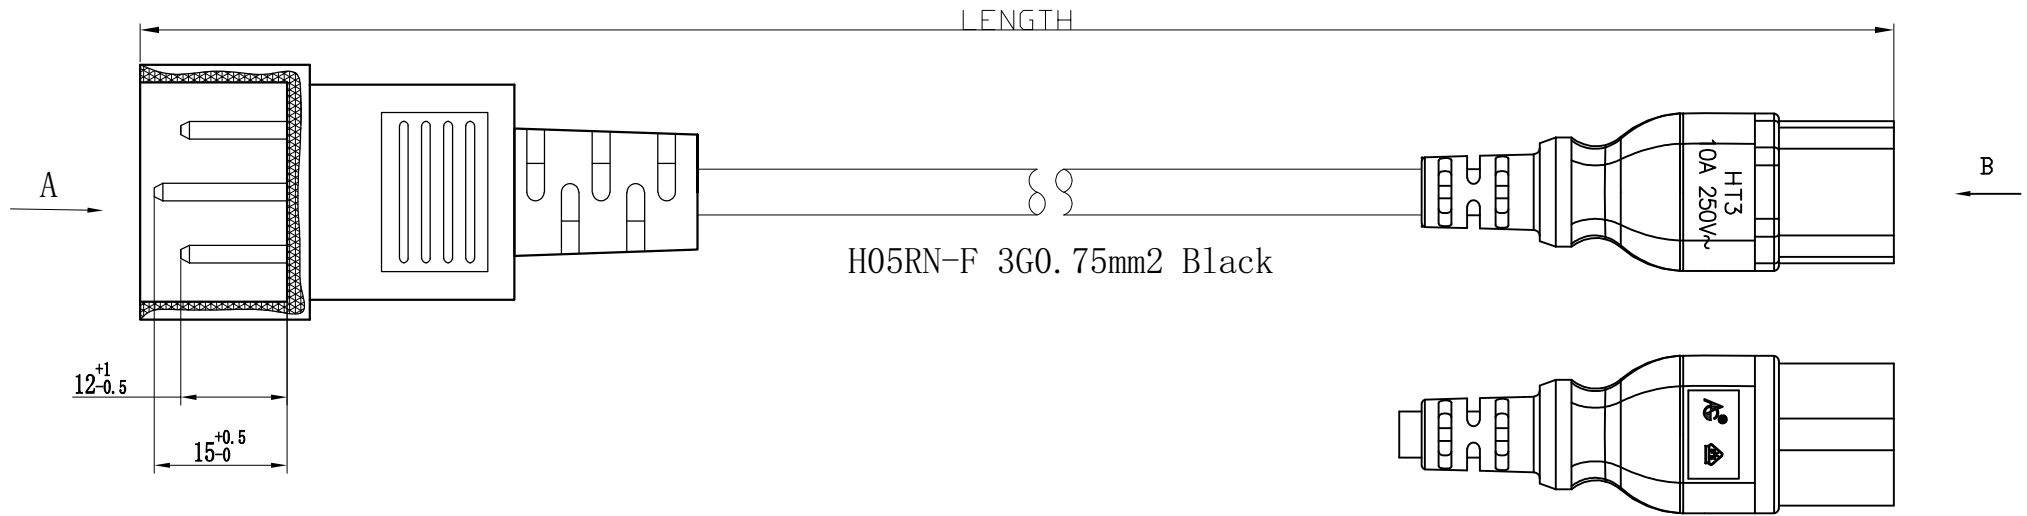

NO.	27-0328	27-0329
LENGTH (mm)	1000	2000
COLOR	BLACK	BLACK

Notes:

1. Plug: JT-SZ3/HT3 Clear injection no scratch and dirt;
2. Cable: H05RN-F 3G0.75mm² Jacket $\phi 7.0 \pm 0.1$ Conductor $24 \times 0.198 \pm 0.004$ Core $\phi 2.4 \pm 0.1$
Cable Mark: $\triangle VDE \triangleright$ H05RN-F 3G0.75mm²
3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

尺寸标注		公差		第三角度投影			第X张 共X张			
DIMENSION		TOLERANCE		版本	A	比例	UNIT	mm	比例	A4
长度	LENGTH	公差	ANGLE	版本	比例	1:1	UNIT	mm	比例	A4
<200	±0.1	±0.5°	FILE LOCATION							
200~500	±0.3		FIGURE NO							
500~800	±0.5		FIGURE NO							
<800	±1.0		FIGURE NO							
设计	DESIGN	产品名称		JT-SZ3/HT3						
审核	AURIT	PRODUCTOR NAME								
批准	APPROVAL									