



| | | | | |
|-------|---------------|------|-----------|---------|
| RevNo | Revision note | Date | Signature | Checked |
|-------|---------------|------|-----------|---------|

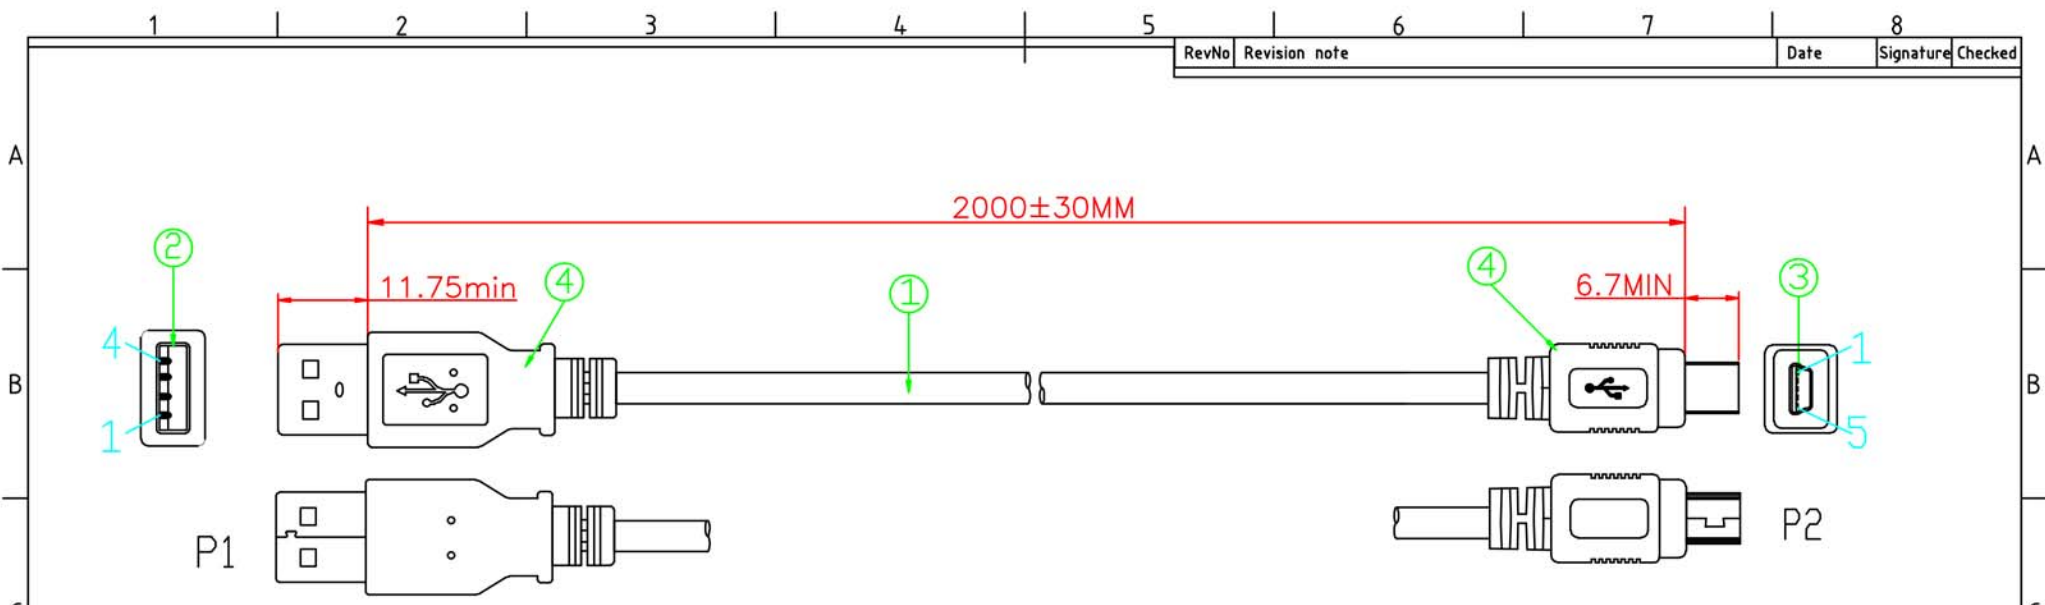

NOTES:

- 1:100% short,open and miss wire test.
- 2:Cable marking:CONNEkT GEAR AWM STYLE 2725 80°C 30V
VW-1 USB2.0 High Speed Cable RoHS & REACH Compliant

PIN OUT



SHELL ———— SHELL

| | | | | |
|-----|---------------|--|-------|------|
| ④ | OUTER MOULDED | BLACK 45P PVC | 0.021 | KG |
| ③ | CONNECTOR | USB2.0 MINI 5PIN/MALE,BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN, | 1 | PCS |
| ② | CONNECTOR | USB2.0 A TYPE/MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN, | 1 | PCS |
| ① | CABLE | 1P*7/0.12BC+2C*7/0.12BC+AL+B,JACKET:BLACK PVC,OD:3.9±0.1MM | 2000 | MM |
| NO. | MATERIAL | DESCRIPTION | QTY. | UNIT |

| | | | | | | |
|-------------|------------|---|-----------|---------------------------------------|-----------------------|--------------|
| Ltemref | Quantity | Title/Name,designation,material,dimension etc | | | Article No./Reference | |
| Designed by | Checked by | Approved by - date JUL 27.2015 | File name | Date JUL 27.2015 | Scale FREE | |
| ANGLE: | | | | USB 2.0 MINI 5PIN CABLE,AM-MINI,BLACK | | |
| UNIT:MM | | | | 26-2850 | Edition 1 | Sheet 1/1 |