


P/N	L/(M)	T/(MM)
26-2944	0.5	20
26-2945	1.0	20
26-2923	2.0	30

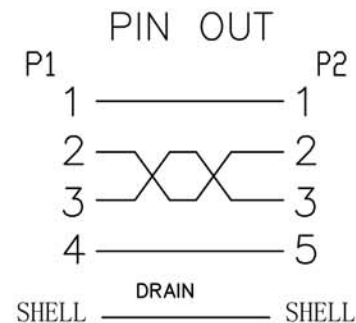

NOTES:

- 1:100% short,open and miss wire test.
- 2:Cable marking:CONNEkT GEAR AWM STYLE 2725 80°C 30V
VW-1 USB2.0 High Speed Cable RoHS & REACH Compliant

④	OUTER MOULDED	BLACK 45P PVC	0.032	KG
③	CONNECTOR	MICRO USB 5PIN B/M,BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	1P*28AWG+2C*28AWG+ALF+D+B(48/0.12ALM),JACKET:BLACK PVC,OD:3.9±0.1MM	L	M
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date AUG.5.2015	File name USB2.0 AM-MICRO B	Date AUG.5.2015	Scale FREE	
ANGLE:				USB2.0 AM-MICRO 5PIN BM		
UNIT:MM				26-2944, 26-2945,26-2923	Edition 1	Sheet 1/1