


P/N	L/(M)	T/(MM)
26-6020	2	30
26-6030	3	45

NOTES:

- 1:100% short,open and miss wire test.
- 2:CABLE MARKING:DisplayPort Cable E\*\*\*\*\* AWM STYLE 20276 80°C 30V VW-1
- 3:ROHS & REACH Compliant

PIN OUT

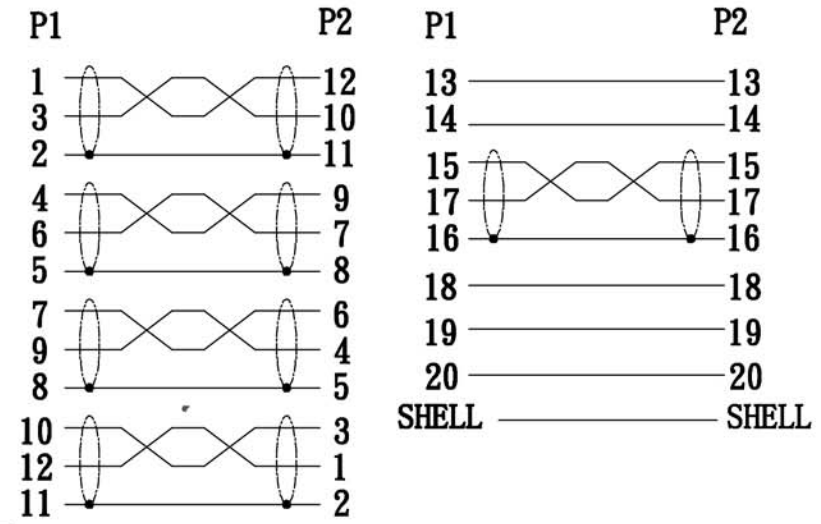

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑤	OUTER MOULDED	BLACK 45P PVC	0.028	KG
④	INNER MOULDED	LDPE	0.021	KG
③	SHELL	ABS OUTER COVER FOR DP MALE,HOOK TYPE,BLACK	2	PCS
②	CONNECTOR	DP MALE,HOOK TYPE,GOLD PLATED CONTACTS AND SHELL,BLACK INSULATION	2	PCS
①	CABLE	(1P*7/0.1TC+D+FAM)*5C+5C*7/0.1TC+FILL+AL+D+B, JACKET:BLACK_PVC.OD:6.0±0.2MM	L	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference		
Designed by	Checked by	Approved by - date JUL 27,2015	File name	Date JUL 27,2015	Scale FREE
ANGLE:			DISPLAYPORT CABLE,1.2V,M-M,BLACK		
UNIT:MM			26-6020,26-6030	Edition 1	Sheet 1/1